

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER SYSTEM

HSTTPN 50 438 Q C

COLOR
C = CLEAR

QUANTITY PER CARTON:
X = 10 PCS
Q = 25 PCS
C = 50 PCS

LENGTH INCHES [mm] FEET [m]
4.38 [111.3] 3.0 [30.5]
7.13 [181.1]
7.50 [190.5]
7.75 [196.9]
9.25 [235.0]
9.50 [241.3]


TUBING SIZE EXPANDED I.D.

THIN WALL PVC HEAT SHRINK TUBING

PANDUIT P/N	MIN. EXPANDED I.D. IN [mm]	MAX. RECOVERED I.D. IN [mm]	MIN. RECOVERED WALL IN [mm]
HSTTPN50	.462 [11.74]	.250 [6.35]	.022 [.56]
HSTTPN62	.562 [14.27]	.313 [7.95]	.027 [.69]
HSTTPN75	.697 [17.70]	.375 [9.53]	.027 [.69]
HSTTPN100	.900 [22.86]	.500 [12.70]	.030 [.76]
HSTTPN150	1.395 [35.43]	.750 [19.05]	.030 [.76]
HSTTPN200	1.800 [45.72]	1.000 [25.40]	.039 [.99]

NOTES:

1. MATERIAL: NON-CROSSLINKED PVC.
2. COLOR: CLEAR
3. SHRINK RATIO: 2:1
4. SHRINK RATIOS ARE APPROXIMATIONS; PLEASE REFER TO DIMENSIONAL TABLE FOR THE EXACT MINIMUM EXPANDED AND MAXIMUM RECOVERED I.D.'S
5. "ALL WARRANTIES, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE EXCLUDED. (USER IS RESPONSIBLE TO DETERMINE SUITABILITY OF PRODUCT FOR INTENDED USE)."
6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT [mm]
7. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX.

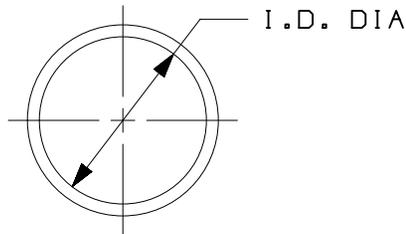

						TITLE CRYSTAL CLEAR THIN WALL PVC HEAT SHRINK (HSTTPN)			
						CUSTOMER DRAWING			
						ITEM REVISION NAME G03597HN/00		PANDUIT	
						DATASET FILE NAME G03597HN_DC_GB02390C_01A			
						UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL: SEE NOTES	
						.x ± .05 [1.3] .xxx ± .010 [.25] .xx ± .02 [.5] ANGLES ± 5 °		DRAWING NUMBER: GB02390C-DC	
1 04-28-15 JBN MRJS RGRO A. UPDATED DRAWING TO CURRENT STANDARDS						GB02390C-DC		THIRD ANGLE PROJECTION	
REV						BY		CHK	
APR						DESCRIPTION		ECN	
						DRAWN BY T. SAMPLES		DATE 12-02-09	
						CHK		SCALE N.T.S.	
						SHT 1 OF 1		SIZE A	

D10100DA/16